






Solar charger with a load output. The load output protects the battery against a too deep discharge.

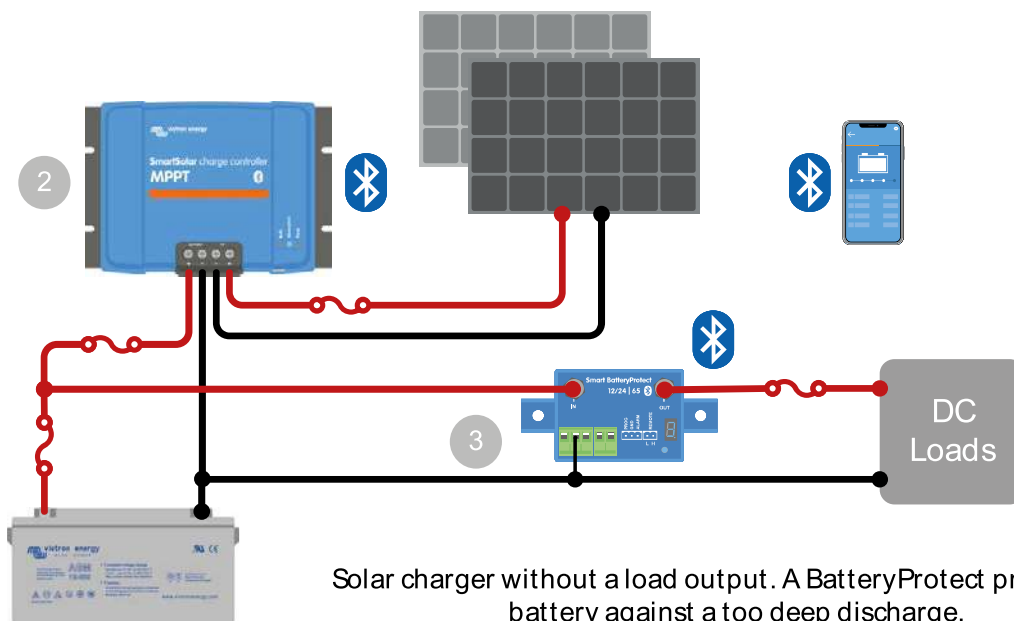

Solar charger without a load output. A BatteryProtect protects the battery against a too deep discharge.

ID	Items and notes
1	Solar charger with load output, available in 10, 15 or 20A models, for 12, 24 or 48V, with or without Bluetooth.
2	Solar charger, available up to 100A, for 12, 24 or 48V, with or without Bluetooth.
3	BatteryProtect, available in 65, 100 or 220A models, for 12, 24 or 48V, with or without Bluetooth.
	Solar panel or solar array.
	12, 24 or 48V battery or battery bank consisting of multiple batteries in series, parallel or series/parallel.
	DC fuse.
	Positive (red) and negative (black) DC cables. For the correct cable sizing see the <a href="#">Wiring Unlimited book</a> .

